


## DIRECT BURIAL AUDIO CABLE 16 AWG / 4 Conductor

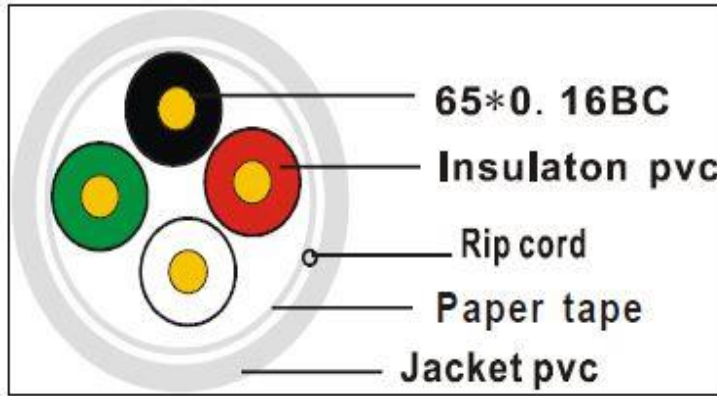

### Description

16/4 Stranded CMR/CL3R Direct Burial Sound Audio Cable

### Applicable Standards

- For Communication and Signal Control Systems
- 4 Oxygen Free Bare Copper Conductors in an Overall Jacket

### Physical Characteristics

Conductor		Oxygen Free B.C.
Number of Conductors		4
AWG		16
Stranding		65
Diameter	(inches)	0.0063
Insulation		PVC
Diameter	(inches)	0.0827
Nominal Wall	(inches)	0.0098
Jacket		FR-PVC
Overall Diameter	(inches)	0.2559
Nominal Thickness	(inches)	0.02165
Paper Tape		Yes
Rip Cord		Yes
Conductor Resistance	(ohms / 1000m)	15.8
Voltage	(volts)	300
Nominal Weight	(pounds)	28

### Colors

Insulation Colors Red / Black / White / Green

### Part Numbers

Part Number	Color	Put-up
AC1604OSPBK4-500	Black	500' Reelex II

### Cable Marking

AUDIO CABLE 4 COND 16 AWG HI-STRAND OXYGEN FREE COPPER  
CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US  
\*\*\*FT