


## 16-4 Unshielded Plenum

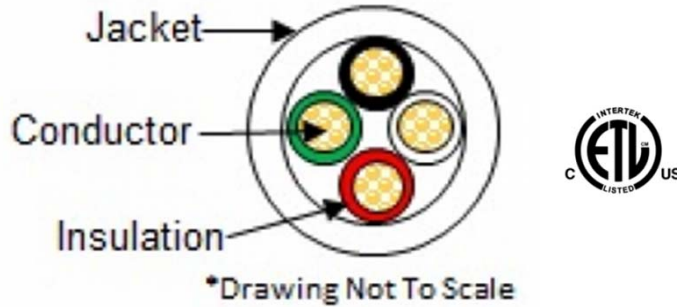

### Applications

This document establishes the specifications for a plenum rated four conductor unshielded cable used for remote control and signaling power limited circuit applications.

### Technical Details

Temperature Rating  
 Operation: -2°C to +60°C  
 Nominal Weight: 44 lbs. / 1,000 ft.

### Construction Details

Number of Conductors: 4/C  
 Conductor: 16AWG Stranded Bare Copper  
 Insulation Material: Remguard Plenum Polymer  
 Nominal Insulation Thickness: 0.007 in.  
 Nominal Insulation Diameter: 0.072 in.  
 Color Code: Black, Natural, Red, Green  
 Jacket Material: Remguard Plenum Polymer  
 Nominal Jacket Thickness: 0.015 in.  
 Nominal Diameter: 0.205 in.  
 Surface Print: 3122598 CMP 16AWG C(ETL)US FT6 + Sequential Footage Marking

### Standards

NEC Article 800  
 CMP Rating FT6

### Codes & Listings

C(ETL)US FT6

### Electricals

Suggested Working Voltage: 300 Volts, rms.

#### Insulation Colors

Black / Red

#### Part Numbers

Part Number	Color	Put-up
AC1604UPBK4-500	Black	500' Reelex II

Toll. 888-492-8363

Tel. 310-885-4200