

## DESCRIPTION


The SLIM-TV/B mounting bracket is designed to mount a soundbar speaker beneath a flat screen TV. It uses the same VESA mounting holes on the back of the TV that the TV wall mount uses. It is both height and depth adjustable, for precise positioning of the soundbar relative to the TV screen. It was designed to work, not only with the outstanding selection of soundbars TruAudio offers, but with most competitors soundbars as well.

## ASSEMBLY


The 3 main components of the SLIM-TV/B are the VERT, WIDE and SPKR brackets. They can be reversed and swapped to accommodate different width and depth combinations of TV's and soundbars. The best configuration of these parts can be determined by using the following steps:

1) Lay the TV and soundbar both face down on the carpet or other flat, non-marring surface. Center the soundbar below the TV, at the desired distance from the bottom edge of the TV.

**Note:** If you are offsetting your soundbar to the front or rear, relative to the TV screen, it is easiest to shim either the TV or soundbar to the desired final position during this step.

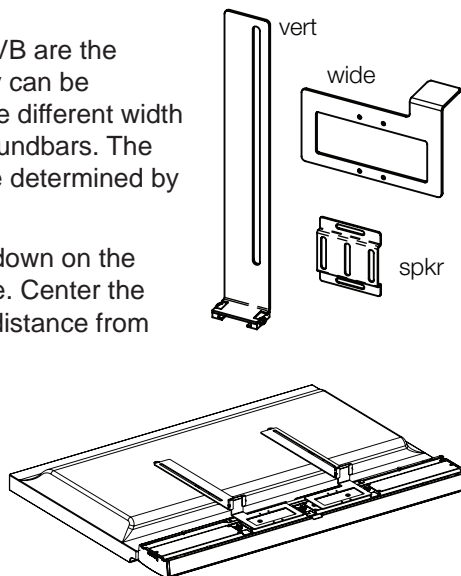

- 2) Have your TV mount ready and test-fit the part(s) that will attach to the TV, to determine if you will need to use the spacers that came with your TV mount. Place any spacers that will be used over the threaded mounting holes in the rear of the TV.
- 3) Remove the screws from both WIDE brackets and set the screws aside.
- 4) Using the graphic below, determine the direction you will need to orient both the VERT and WIDE brackets.

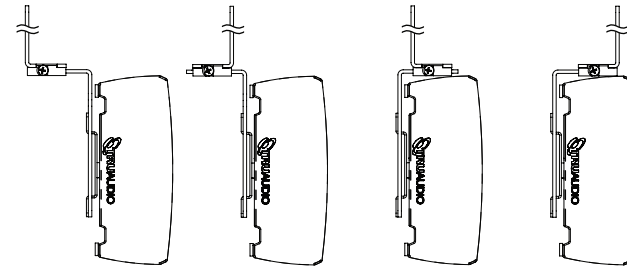


**Note:** You may need to loosen the screws in the lower part of the VERT bracket to allow the WIDE bracket tab to move freely.

5) Loosely assemble the brackets and place them into position on the TV and soundbar, so that the mounting holes for the soundbar are visible.


**Note:** You may need to swap positions of the WIDE or VERT brackets, in order to line things up correctly.

6) Place the SPKR brackets in the opening of the WIDE brackets so that the soundbar mounting holes are aligned with one of the vertical slots. Using the screws removed in step 2 attach the SPKR brackets loosely to the WIDE brackets.

7) Using the hardware provided with the soundbar, attach it to the SPKR brackets. Leave the screws loose for now.

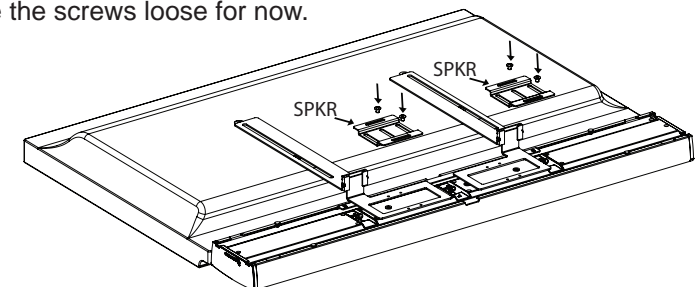

8) Loosely attach the TV mount to the back of the TV according to the TV mount instructions, sandwiching the two VERT brackets between the TV mount and either the TV itself, or, if spacers were needed, the spacers for the TV mount.

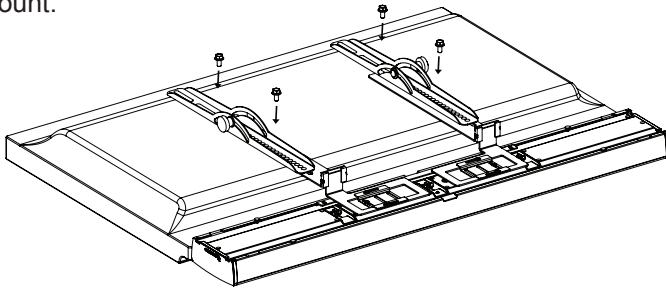

9) Align all the brackets, making sure the soundbar is still centered with the TV, and tighten all hardware. Do not forget to tighten the screws that limit the front/rear movement where the VERT and WIDE brackets meet.

10) The TV and soundbar are now securely connected and can be mounted to the wall according to the TV wall mount instructions.

**MOUNTING COMPATIBILITY**

The SLIM-TVB has a vertical adjustment range of 1.4" (35mm), for use with soundbars between 4.2 and almost 7" tall. It has a front/rear adjustment range of 3.5" (90mm) to adjust the soundbar flush with a wide range of TV thicknesses. The SLIM-TVB can be used to mount any TruAudio soundbar to TV's with the VESA mount patterns from 200mm to 60mm wide. If mounting a non-TruAudio soundbar, refer to the chart below for compatibility:

<b>VESA Mounting Pattern</b>	<b>Soundbar Mount Pattern Width</b>
VESA 200mm x 200mm, VESA 200mm x 400mm	7.6" (194mm) to 18.9" (480mm)
VESA 400mm x 400mm	4.7" (120mm) to 26.8" (680mm)
VESA 600mm x 200mm, VESA 600mm x 400mm	12.6" (320mm) to 34.6" (880mm)
VESA 280mm x 150mm	10.8" (274mm) to 22.0" (560mm)

SoundVision Technologies dba TRUAUDIO  
**FLEX PRODUCT WARRANTY**

All Flex mounts have a limited lifetime warranty. This warranty includes lifetime parts and repair labor on all components. The warranty extends only to the original purchaser of the product and not to any subsequent owner. TRUAUDIO's obligation under these warranties is limited to repairing or replacing any component found defective in material or workmanship under normal conditions of use with an equal and/or current product. These warranties shall not apply to products which have been abused, modified, or disassembled. Products to be repaired or returned under this warranty must be returned to the factory through an authorized TruAudio dealer with all transportation and insurance charges prepaid.

It is the policy of TRUAUDIO to continuously incorporate improvements into our products. All specifications are subject to change without notice. If you have any questions regarding this or any other TRUAUDIO products, please visit [www.TruAudio.com](http://www.TruAudio.com) or contact us:

Office: 1-888-858-1555, Monday-Friday 7 am - 6 pm MST.  
 Fax: 435-251-9815  
 Email: [CustomerService@truaudio.com](mailto:CustomerService@truaudio.com)