


FOA-SM-LCU-**-MF

LC/UPC Single Mode Fixed Fiber Optic Attenuator Male to Female

Our single-mode fixed fiber optic attenuators offer low reflection, high mode stability and a variety of attenuation values.

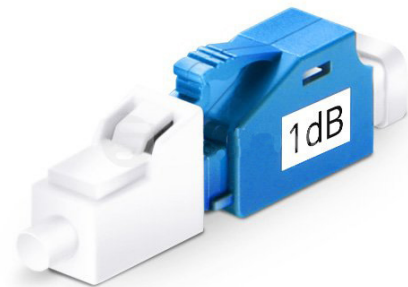

Features & Specifications

dB VALUES OPTIONS: ** 01, 02, 03, 05, 07, 10, 15, 20, & 25

Fiber Connector: LC/UPC

Ferrule Type: Zirconia Ceramic

Connector Gender: Fixed Male to Female

Transfer Mode: Singlemode

Attenuation: 1~25dB

Operating Wavelength(nm): 1260~1620(SM)

Attenuation Accuracy: $\pm 10\%$ dB

Return Loss: ≥ 55 dB

Polarization Dependent Loss: ≤ 0.2 dB

Max Optical Input Power: 200mW

Humidity: 95%RH

Operating Temp Range: -40~80°C

Storage Temp: -40~85°C